


SPECIAL FLOORING

SHINE Emery Safety Flooring **3.0T**



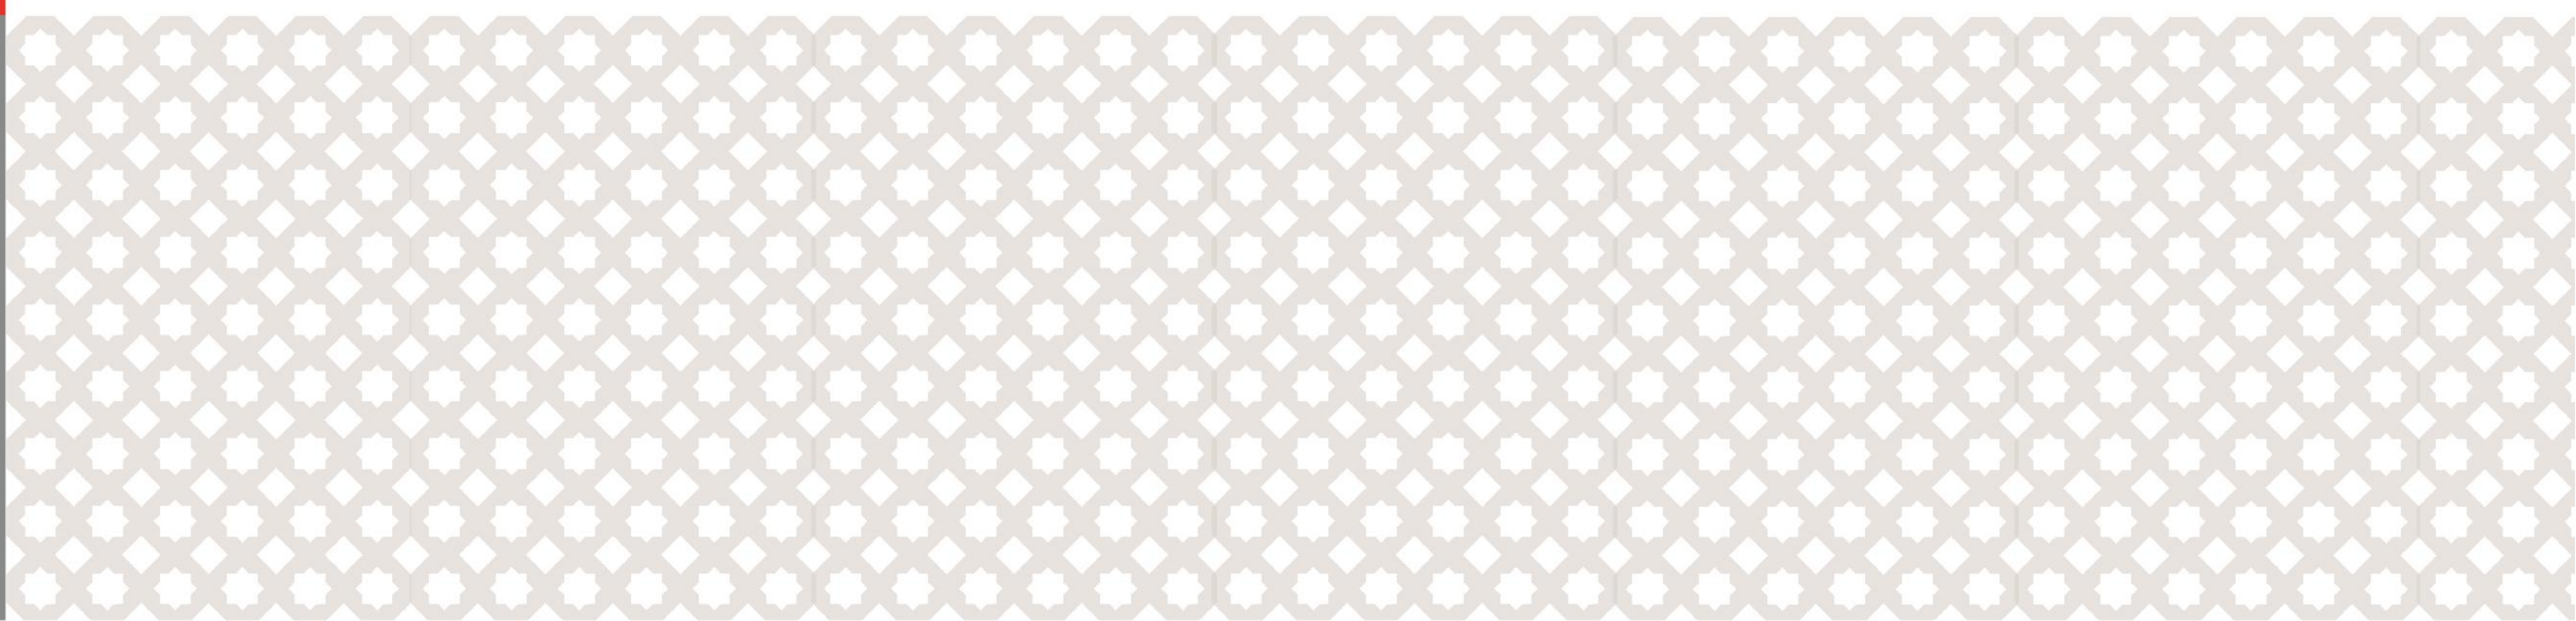


Unique embossing treatment ensures excellent anti-slip performance.



The emery granules are coated with resin on the surface, improving the wear resistance.


SHINE ADVANTAGE

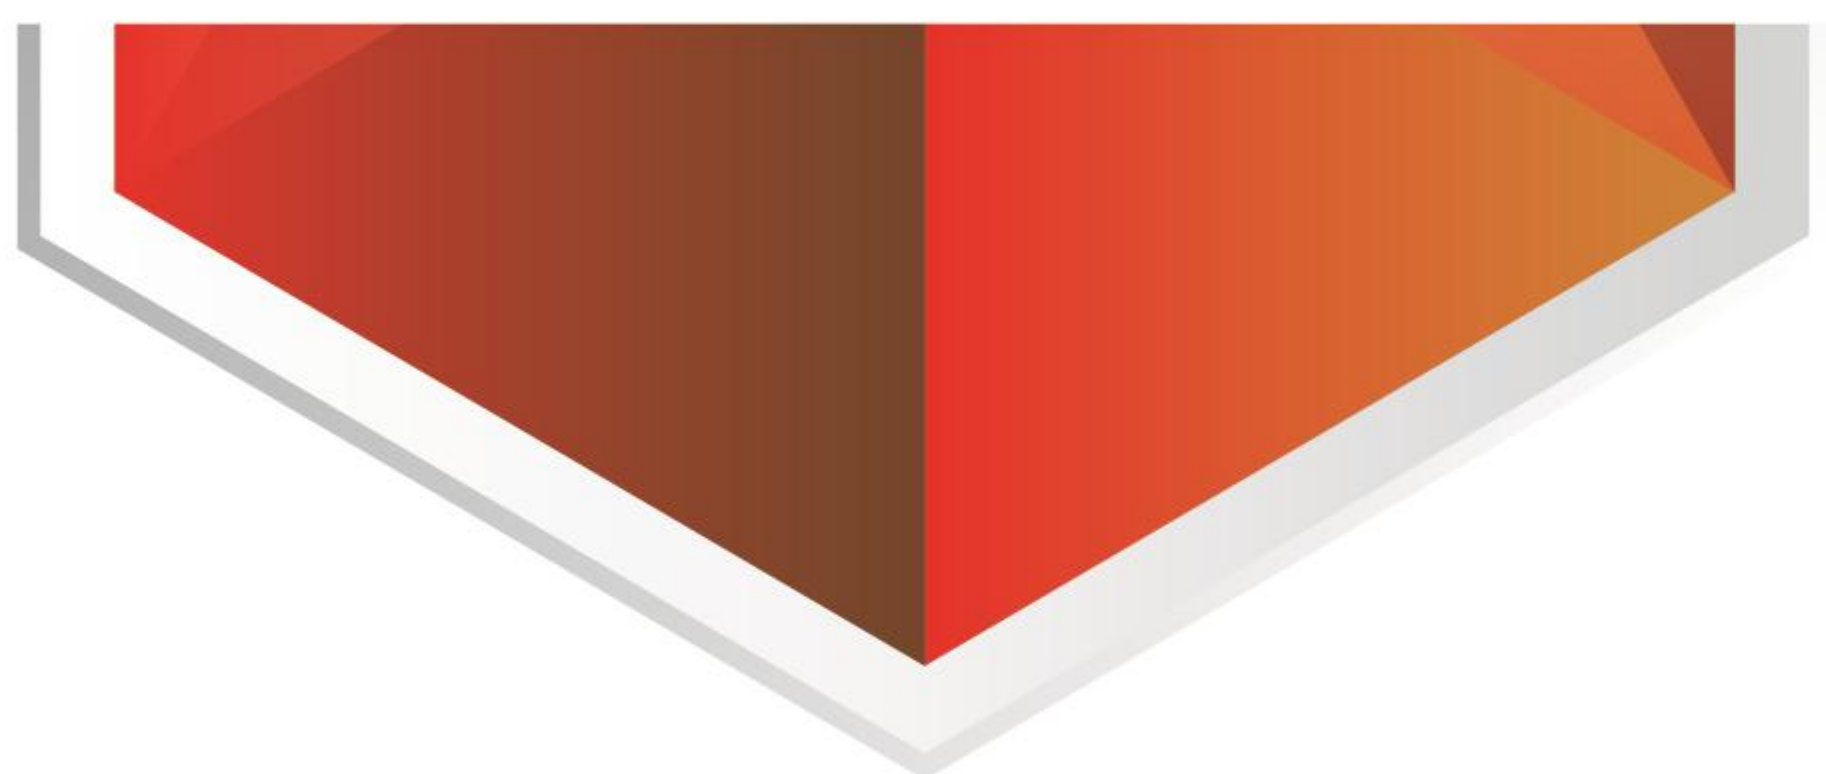


Fire-proof performance: B1




Water-proof.

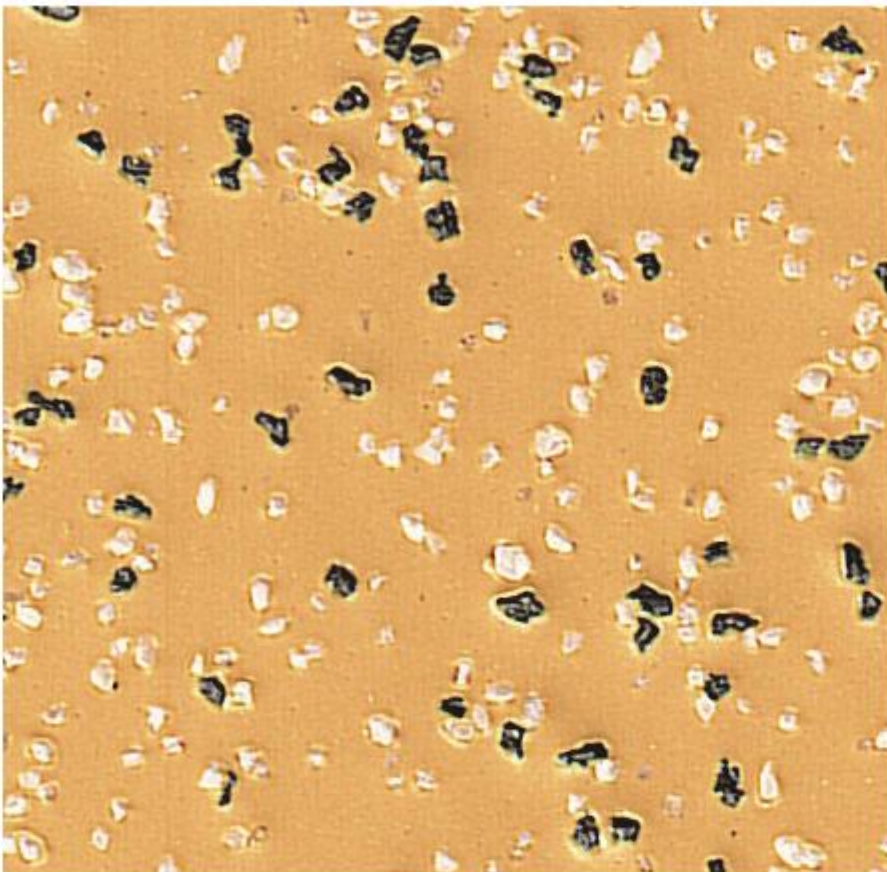

GHS-1040

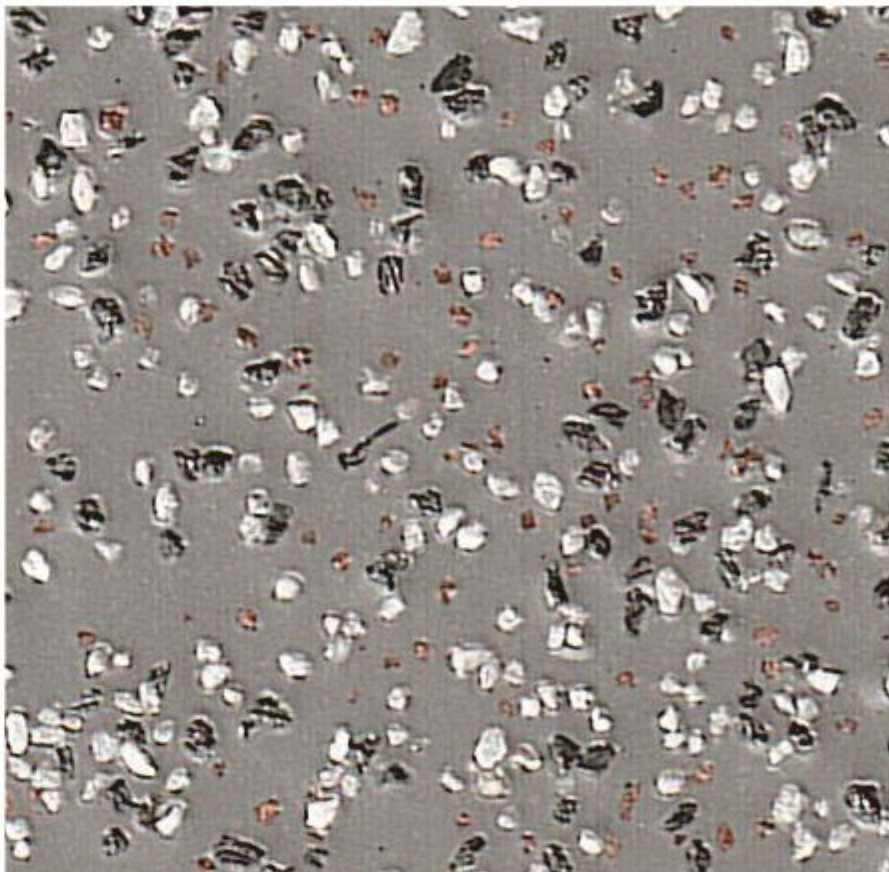


GHRP20-3010

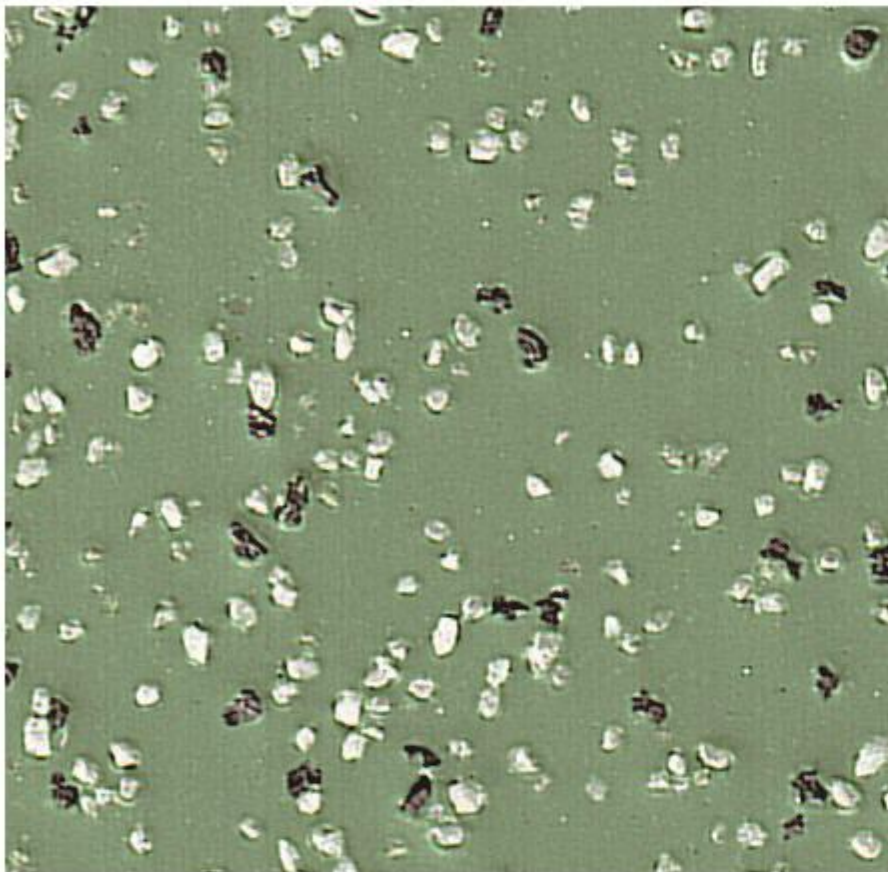


GHRP20-3020




GHRP20-3060

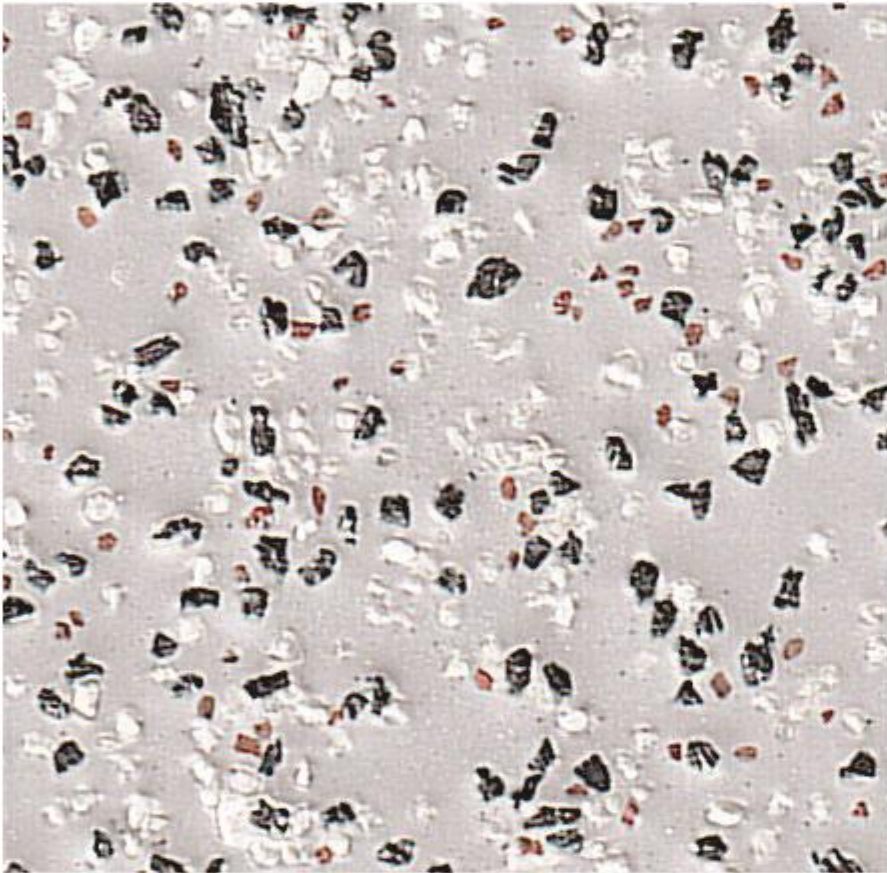


GHRP20-3092

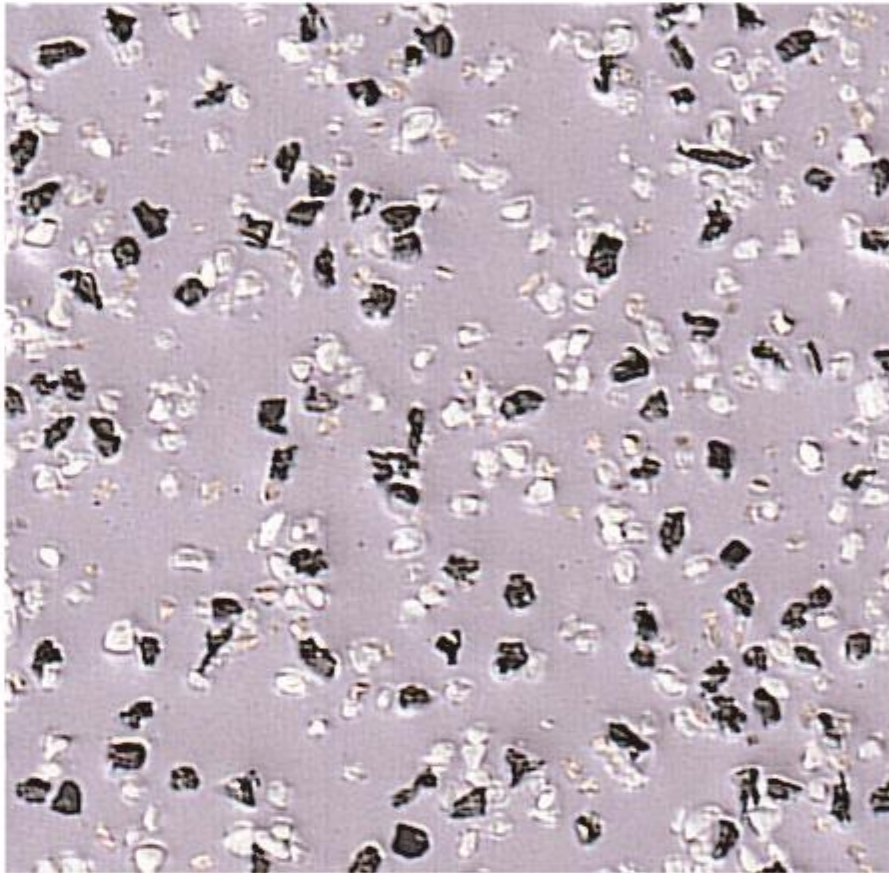


GHRP20-3820

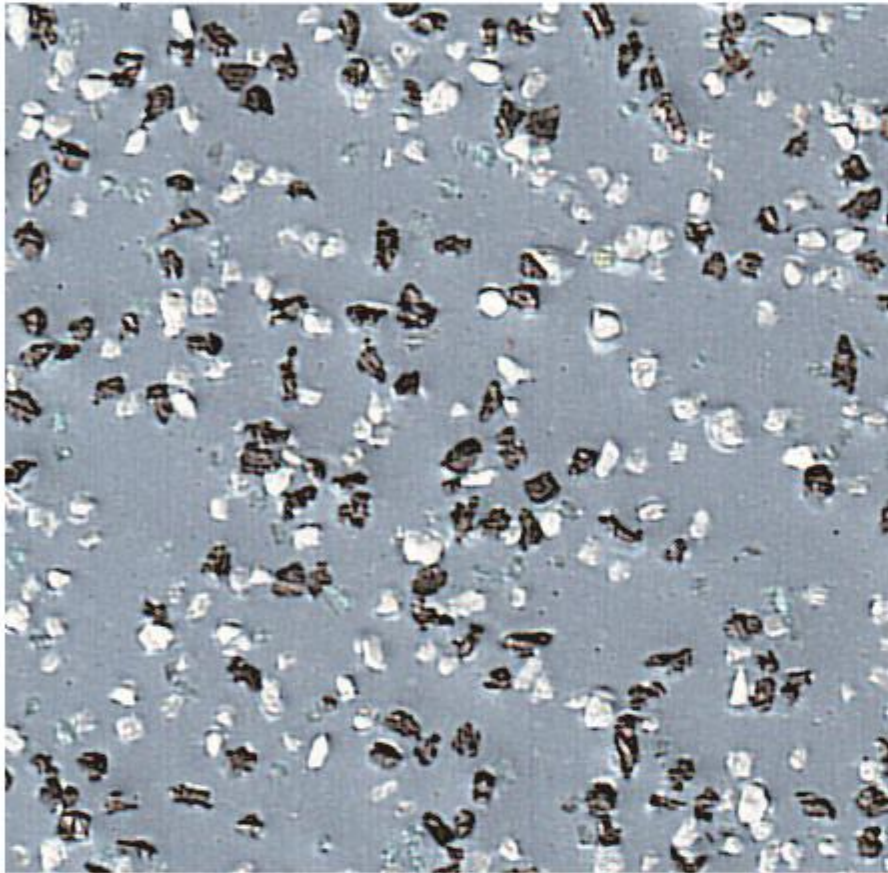


GHRP20-4020

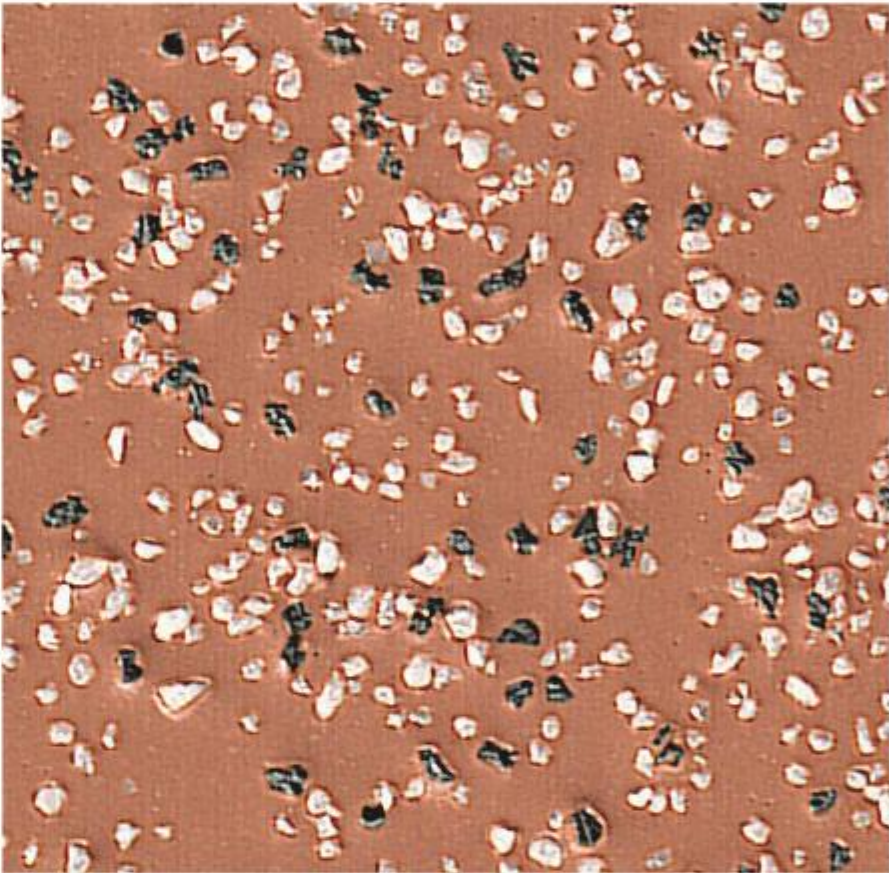


GHRP20-4030

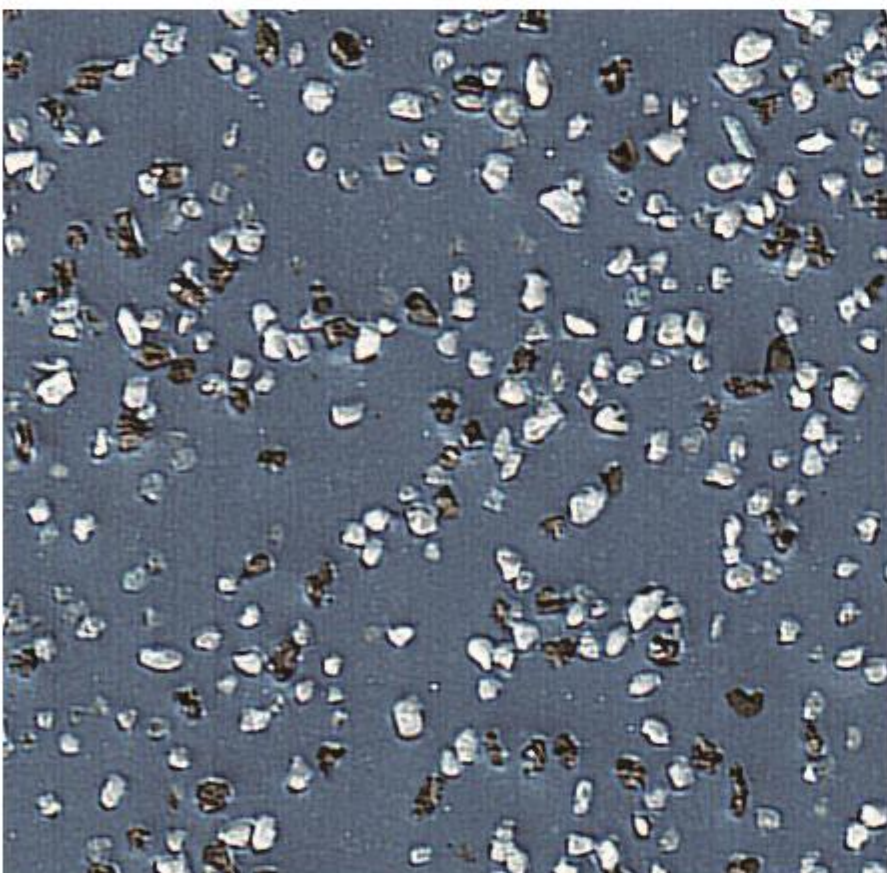


GHRP20-5030

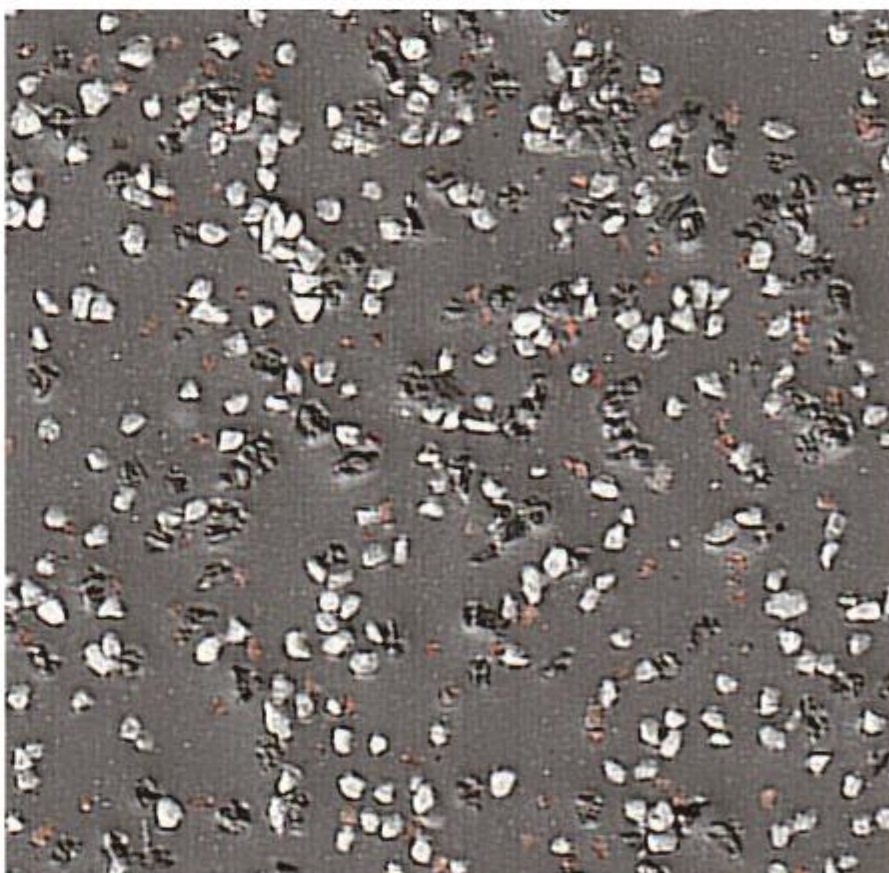

GHRP20-6305

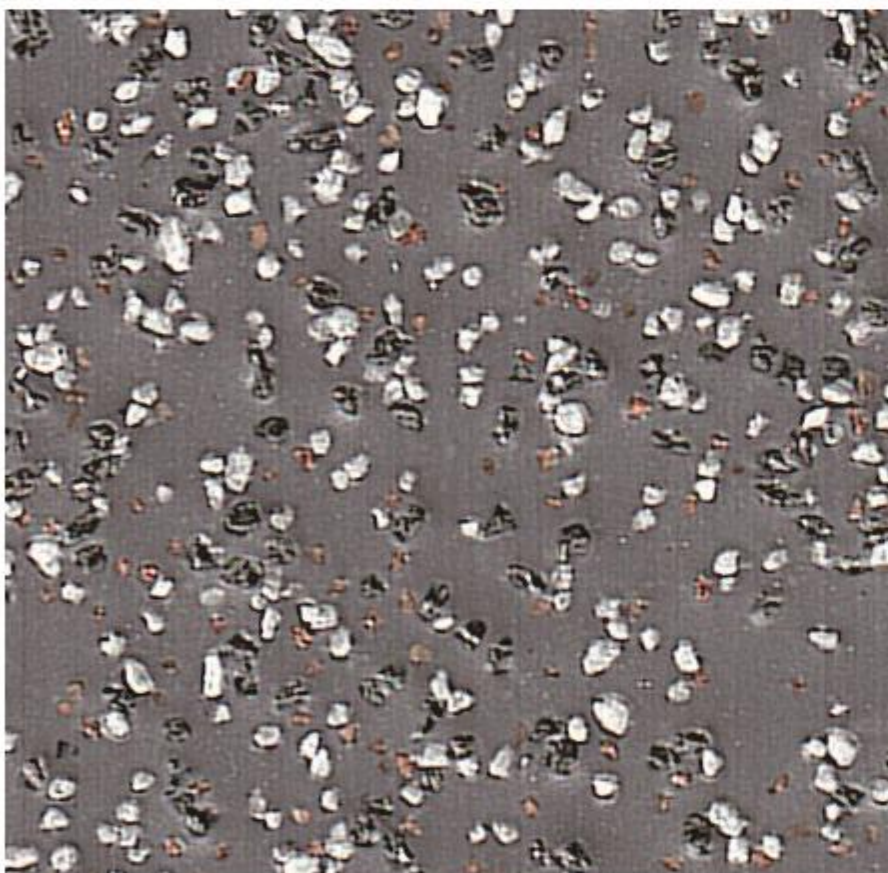

GHRP20-6306

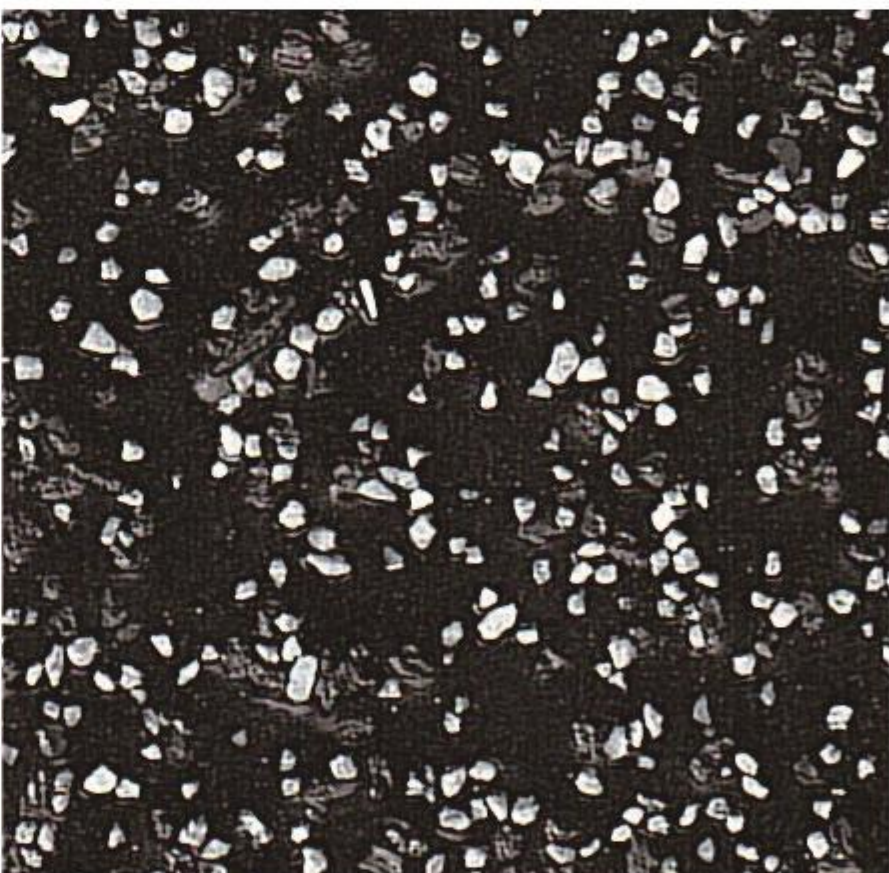

GHRP20-8500

Test Items	Test Method	Test Results
Total Thickness	GB/T11982.1 / ISO24346	2.0mm
Wear Layer Thickness	GB/T11982.1 / ISO24340	0.5mm
Weight	GB/T11982.1 / ISO23997	3500g/m²
Roll Width	GB/T11982.1 / ISO24341	2m
Roll Length	GB/T11982.1 / ISO24341	20m
Abrasion Group	GB/T11982.1 / EN660-2	Group T
Residual Indentation	GB/T11982.1 / ISO24343-1	0.2mm
Color Fastness	GB/T11982.1 / ISO 105-BO2	Grade ≥6
Anti-Chemical Resistance	GB/T11982.1 / ISO26987	Fine
Dimensional Stability	GB/T11982.1 / ISO23999	≤0.2%
Anti-slip Performance	DIN51130	R12
Roller Wear	GB/T11982.1 / ISO4918	> 25000R
Fire-proof Performance	GB/T8624	Grade B1
Limit of Harmful Substances	GB18586	Qualified

Case Presentation

