




贯恒 用品质铸就永恒

# 特种地板系列 - 金刚砂安全防滑地板

晶锐 3.0mm

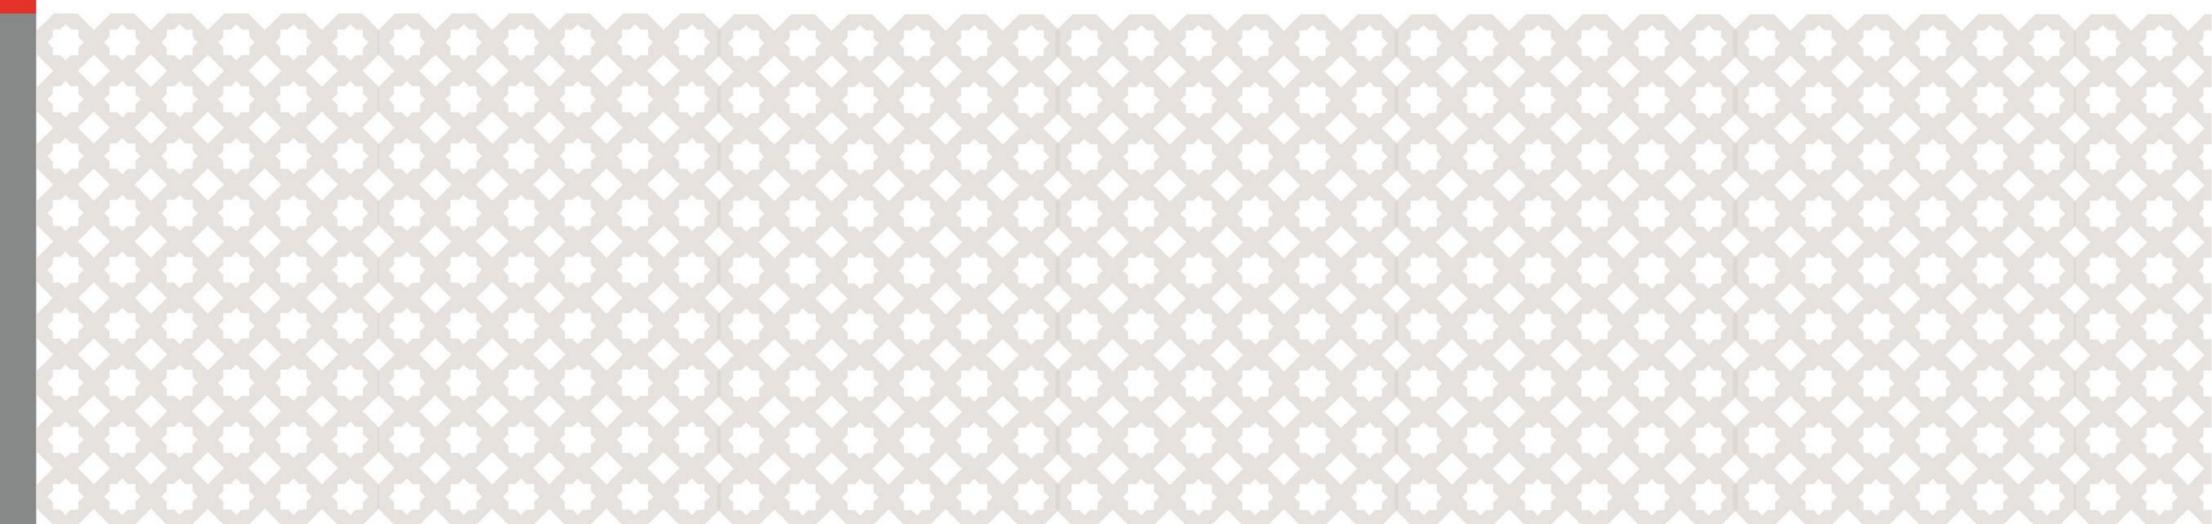



表面嵌入金刚砂，特殊压纹处理防滑性能极佳




涂覆工艺包裹金刚砂，耐磨性强



防火等级B1级




专业防潮

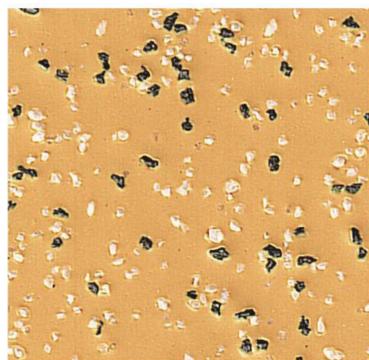

GSH-1040




GHRP20-3010

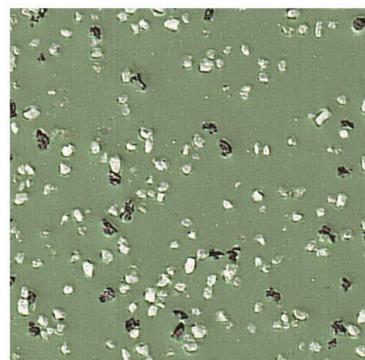


GHRP20-3020




GHRP20-3060

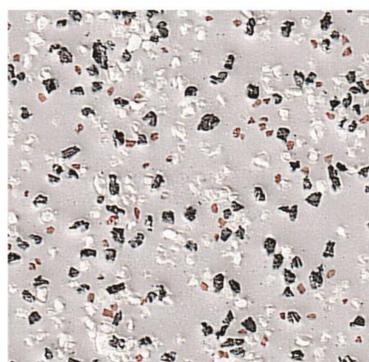


GHRP20-3092

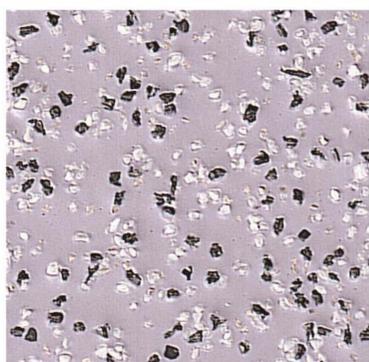


GHRP20-3820

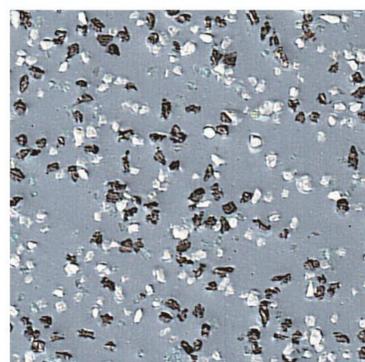


GHRP20-4020

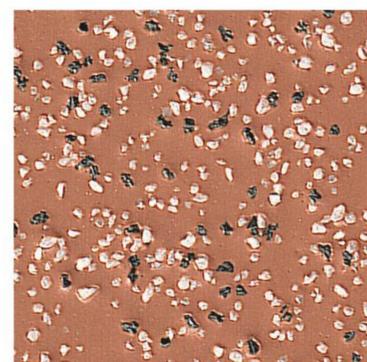


GHRP20-4030

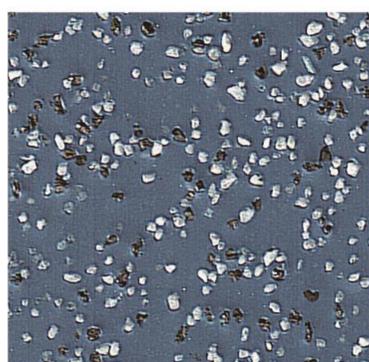


GHRP20-5030

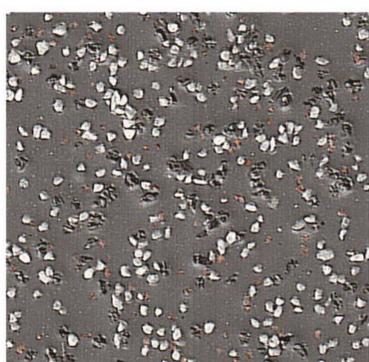

GHRP20-6305

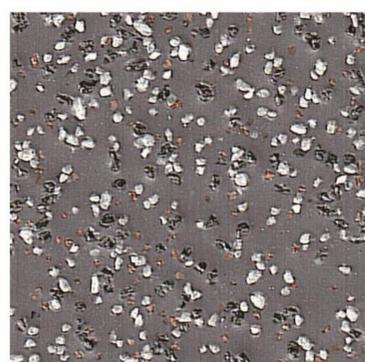

GHRP20-6306

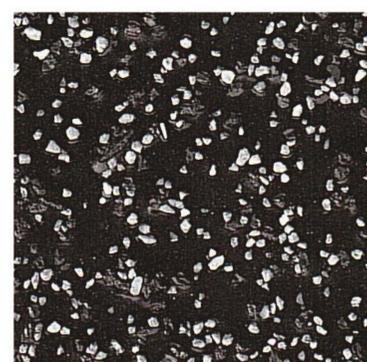

GHRP20-8500

检测项目	检测方法	检测结果
总厚度	GB/T11982.1 / ISO24346	2.0mm
耐磨层厚度	GB/T11982.1 / ISO24340	0.5mm
重量	GB/T11982.1 / ISO23997	3500g/m <sup>2</sup>
卷宽	GB/T11982.1 / ISO24341	2m
卷长	GB/T11982.1 / ISO24341	20m
耐磨等级	GB/T11982.1 / EN660-2	T级
残余凹陷	GB/T11982.1 / ISO24343-1	0.2mm
色牢度	GB/T11982.1 / ISO 105-BO2	≥6级
抗化学性	GB/T11982.1 / ISO26987	良好
尺寸稳定性	GB/T11982.1 / ISO23999	≤0.2%
防滑性能	DIN51130	R12
滚轮磨损	GB/T11982.1 / ISO4918	> 25000转/R
防火性能	GB/T8624	B1级
有害物质检测	GB18586	合格

## 晶锐工程案例

