




贯恒用品质铸就永恒

特种地板系列 - 耐磨塑胶地板

嘉树 2.0mm/3.2mm

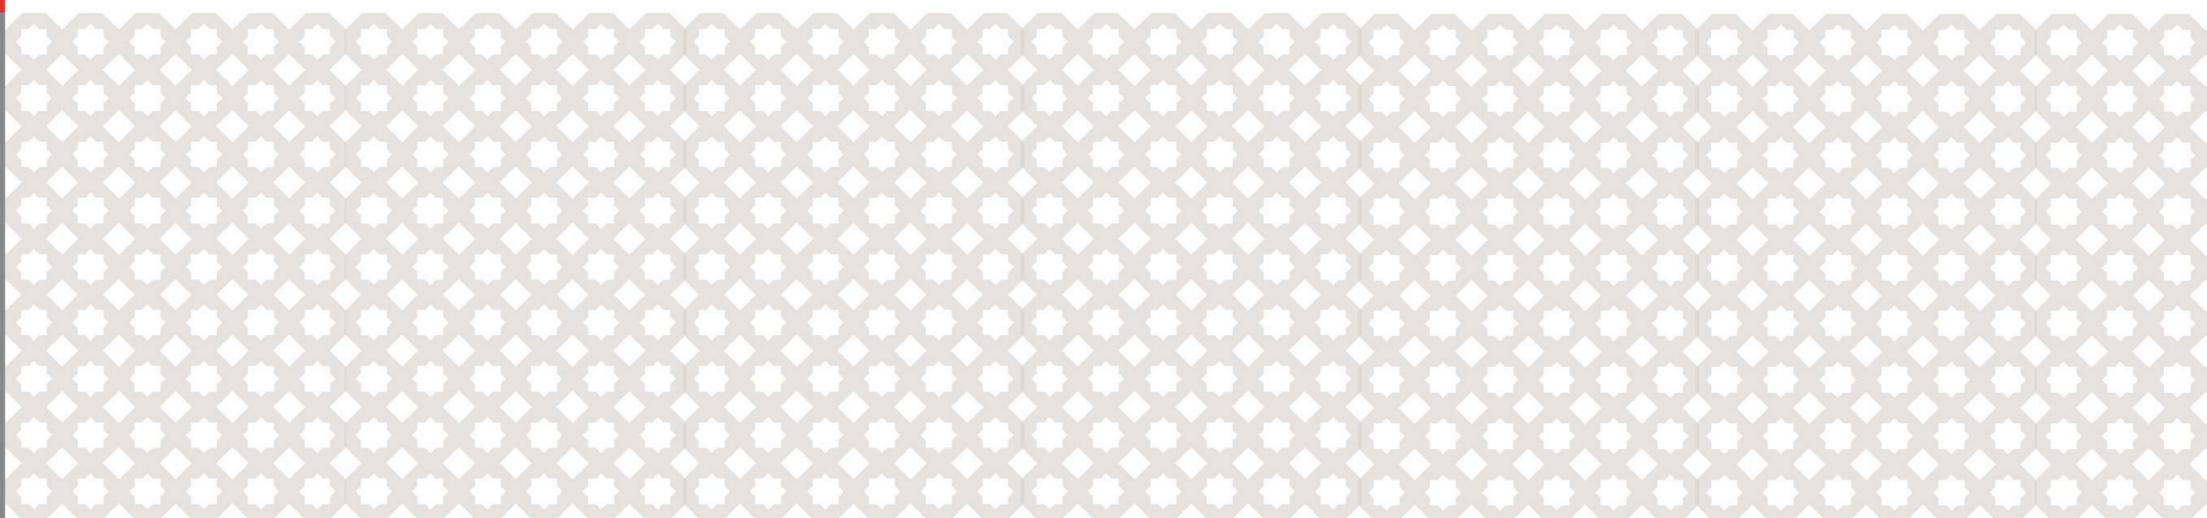



特殊表面处理，耐污性佳




耐磨性能媲美橡胶地板



柔韧性能优于橡胶地板



特殊纹路设计，防滑性佳

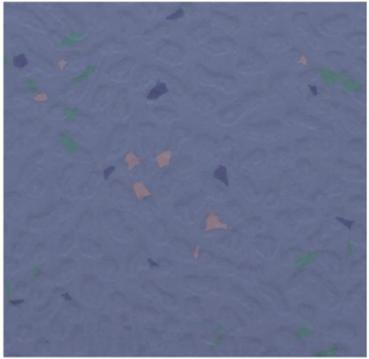

GHRP20-7004



GHRP20-7000




GHRP20-3002




GHRP20-7009




GHRP20-3032

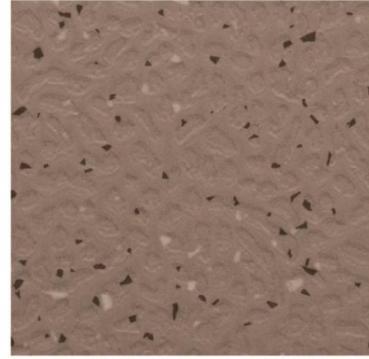


GHRP20-4702

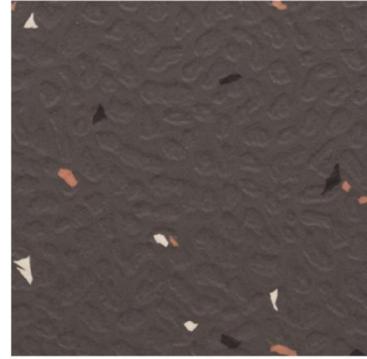


GHRP20-7002

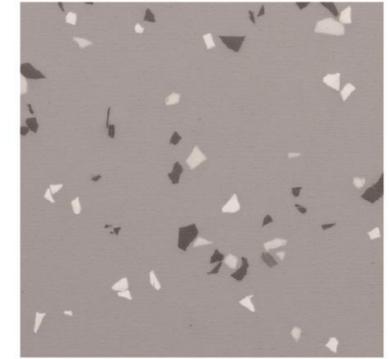

GHRP20-3035

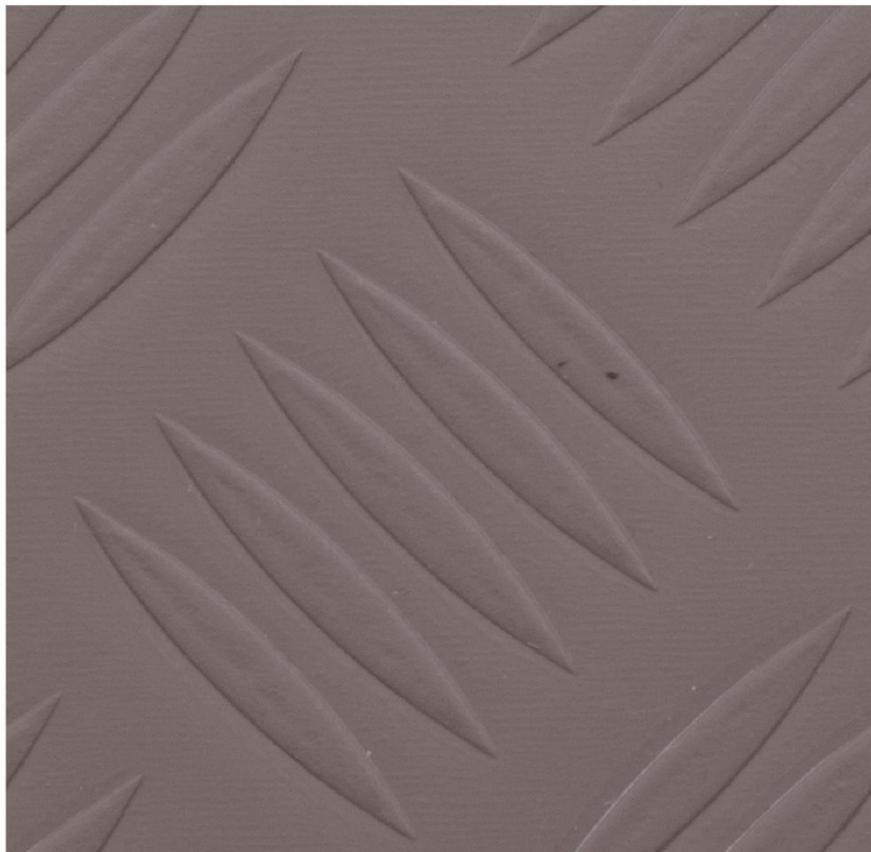

GHHD32-13502

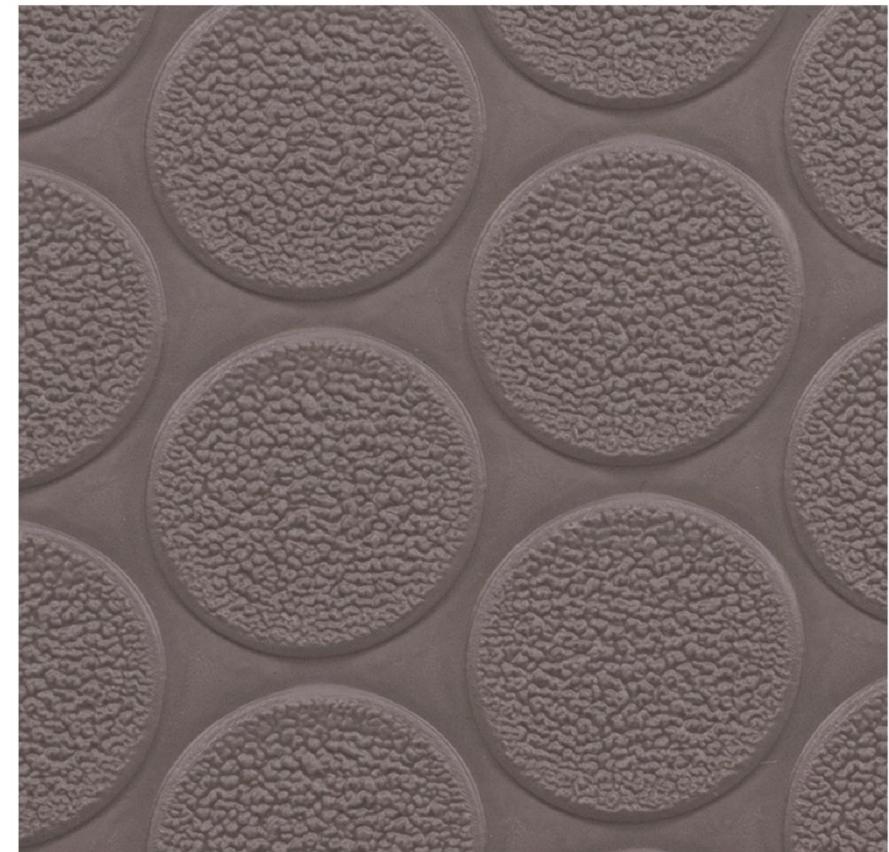

GHHD32-15502

检测项目	检测方法	检测结果
总厚度	GB/T11982.1 / ISO24346	2.0mm/3.2mm
耐磨层厚度	GB/T11982.1 / ISO24340	0.6mm
重量	GB/T11982.1 / ISO23997	2600g/m ² / 4100g/m ²
卷宽	GB/T11982.1 / ISO24341	1.8m
卷长	GB/T11982.1 / ISO24341	20m
耐磨等级	GB/T11982.1 / EN660-2	T级
残余凹陷	GB/T11982.1 / ISO24343-1	≤0.1mm
色牢度	GB/T11982.1 / ISO 105-BO2	≥6级
抗化学性	GB/T11982.1 / ISO26987	良好
尺寸稳定性	GB/T11982.1 / ISO23999	≤0.4%
防滑性能	DIN51130	R9
滚轮磨损	GB/T11982.1 / ISO4918	> 25000转/R
防火性能	GB/T8624	B1级
有害物质检测	GB18586	合格

嘉树工程案例

