


多层复合片材系列

SPC CLICK 嘉蕴 4.0T



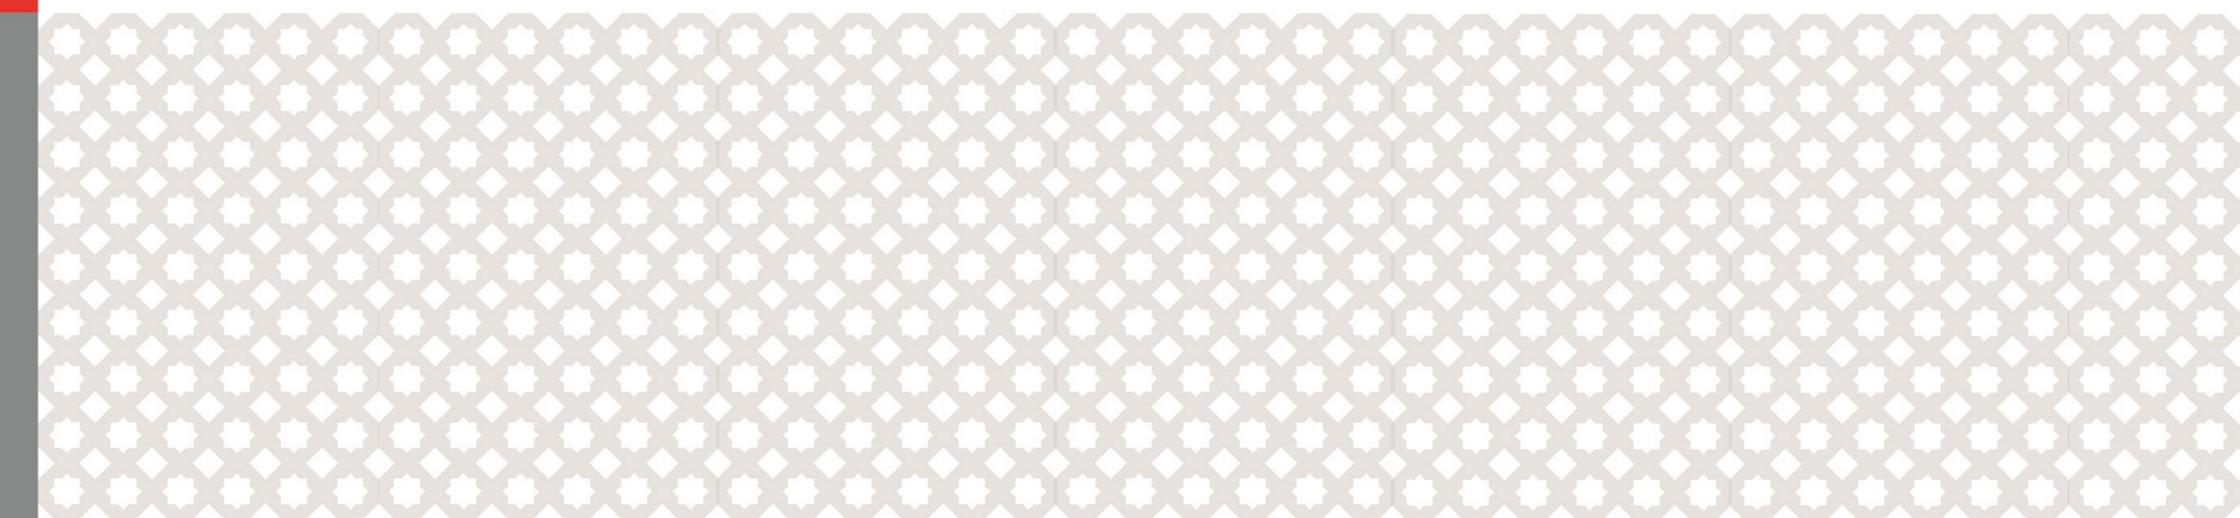

零甲醛，高环保性



防火等级Bf1-s1级



防水防潮，抗菌防霉



锁扣安装，铺装便捷

木纹系列



BXW-29-3



BXW-6045-1



BXW-6049-3



BXW-6062-28



BXW-6066-1



BXW-9366-3




BXW-9366-2



BXW-9366-6



BXW-9366-8

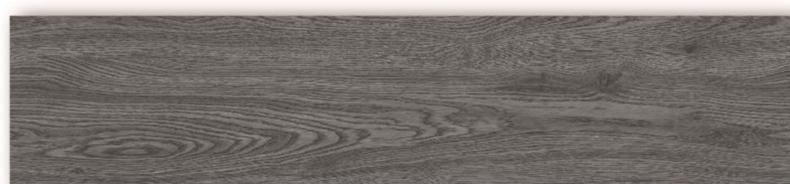

BXW-5088-1



BXW-1059-2



BXW-1059-1



BXW-5088-2



BXW-5088-3



BXS-9366-1

石纹系列



BXS-89706-7




BXS-0125-11



BXS-0125-10

私人定制

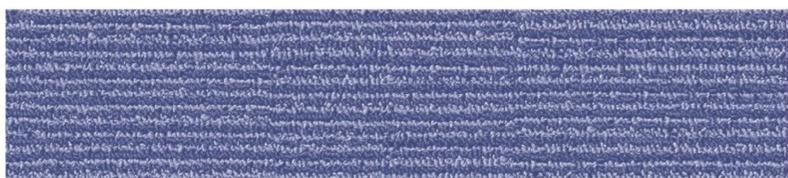

BXC-8801-6



BXC-8800-1



BXC-8801-3



BXC-8800-6




BXC-8801-1



BXC-8800-9




BXC-8804-3

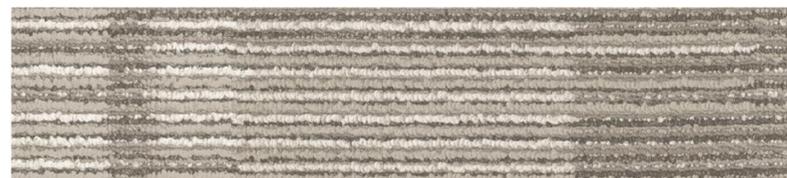

BXC-8804-7



BXC-8804-6

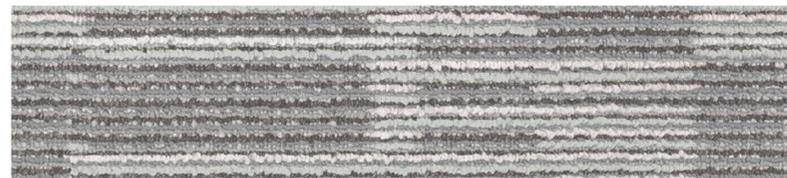

BXC-8804-8

测试项目	单位	标准	检测数据
产品厚度	mm	4.0	4.0
产品密度	kg/m ³	EN436	2000
残余凹陷		0.15 < Is ≤ 0.40	0.16
剥离强度	N/50mm	纵向平均值 ≥ 75	75
	N/50mm	纵向最小值 ≥ 70	70
	N/50mm	横向平均值 ≥ 75	75
	N/50mm	横向最小值 ≥ 70	70
锁扣拉力	KN/m	≥ 1.5	5.7
加热尺寸变化率	%	纵向 ≤ 0.25	0.08
	%	横向 ≤ 0.25	0.07
冷翘曲	mm	≤ 2.0	0.03
燃烧性能		B1	B1
甲醛释放	mg/m ³	≤ 0.124	72h未检出
总挥发物限量	g/m ²	≤ 10	4.9
邻苯类增塑剂	%	≤ 0.1	未检出

嘉蕴SPC工程案例

